

ULTRA X-PAD

BURNISHING DIAMOND PAD

PRODUCT DESCRIPTION

The ULTRA X-PAD is a diamond impregnated floor pad used for burnishing coated and uncoated floors.

PROPERTIES

PROPERTY	VALUE
Thickness	1 in (26 mm)
Weight	23 oz 780 gsm
Fiber Type	Recycled Polyester
Size	20" (520 mm)
Life Cycle	500,000 sq/ft (applying recommended product care instructions)
Abrasive Application	Spray
Abrasive	Industrial Diamond Grit
Color	Gray
Pack	2 per case

PRODUCT USE

This pad is used to burnish/polish floor finish and natural stone floors to a high gloss. Ideal for use on machine speeds up to 3000 rpm. Ultra X pad can be used to polish floors not coated with floor finish, Ñora floors, laminate floors, marmoleum, vinyl, and most synthetic floors.

ENVIRONMENTALLY CONSCIOUS CONSTRUCTION

The ULTRA X-PAD is made of 100% recycled polyester, post consumer and industrial recycled waste products and is impregnated with billions of microscopic diamonds.

DIRECTIONS FOR USE

Dust mop floors prior to burnishing. Use pad until finish gives high gloss. If necessary, dust mop again to remove any potential dusting.

Floor Care


ULTRACHEM LABS



* Ultra Chem Labs awards its internal Environmentally Sustainable Seal to products that meet third party environmental criteria regarding reduced toxicity, biodegradability, packaging and other characteristics focused on creating a more sustainable environment.

PRODUCT CARE

For continued good results, it is important to clean your pads thoroughly by rinsing them off with water. This removes dirt that can wear on the floor and reduce the life of the ULTRA X-PAD.

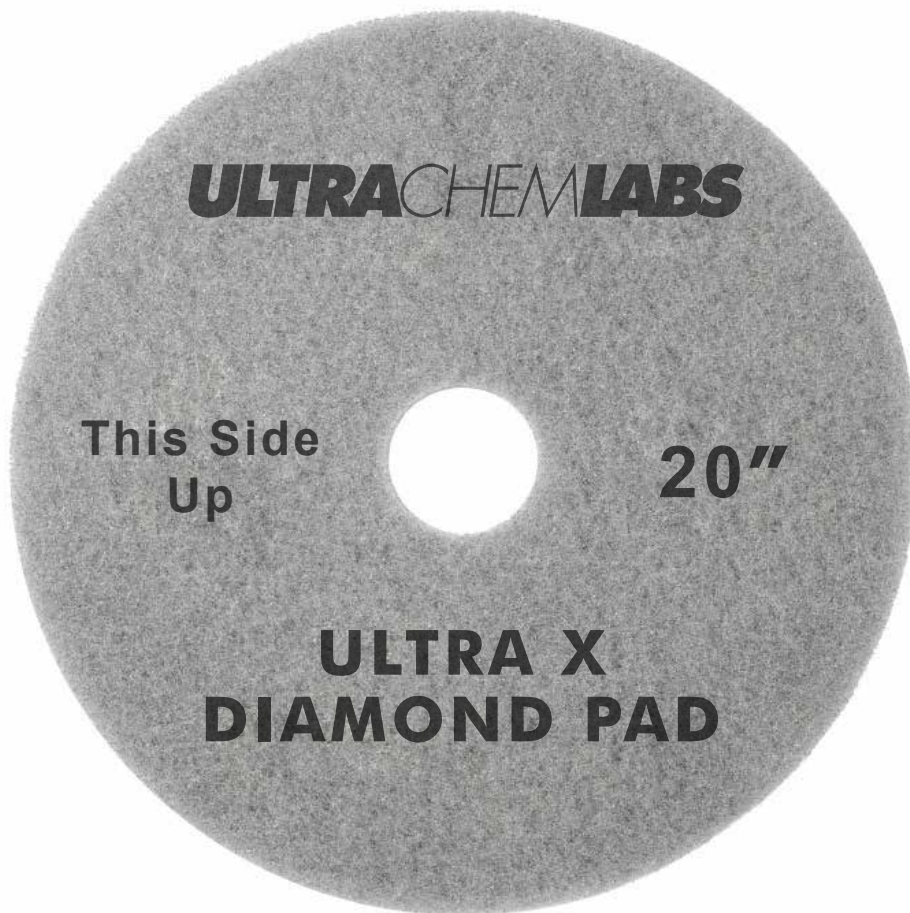

Note: Due to the intrinsic properties of the material and variable conditions of use, there may be slight variations in the specifications and results. Please contact us with any questions or concerns.

Floor Care

ULTRACHEM LABS

FOR MORE INFORMATION
CALL: (909) 317-0473
EMAIL: CS@ULTRACHEMLABS.COM
WWW.ULTRACHEMLABS.COM

ULTRA CHEM LABS CORP
1370 VALLEY VISTA DR
SUITE 200,
DIAMOND BAR, CA 91765